

## Modem Router LTE Wireless 300N (CAT4)

ST-LW501



### 300Mbps Indoor CPE

300M high Wi-Fi speed to enjoy  
Uninterrupted HD movies rapid file  
Downloads, and smooth video chats



### 2 RJ45 Port, LAN

Rj45x2, 10/100/1000M auto-sensing, LAN



### Support IPV4 IPV6

Compatible with IPV4 and IPV6  
(Internet Protocol version 4/6)



### 2 External Antennas

2 External Antennas to keep strong signal  
receiving,workstable and reliable



### Support VPN, VOIP

Multifunctional functions for professional  
settings



### 4G to Wi-Fi, 4G to LAN

Insert 4G SIM card, then you can transmit the  
3G/4G signal to LAN and WIFI signal



### DL 300Mbps, UL 50Mbps

Upload 300Mbps, and Download 50Mbps for  
Fast internet surfing



### Support TR069 Protocol

Support TR069 to control the terminal  
remotely



### SSID Broadcast and Hide WiFi

Easy to set broadcast SSID or Hide SSID



### Maximum Access 64 Devices

You can connect up to 64 users or terminals  
At the same time

## Products Features :


- Support TDD-LTE, FDD-LTE
- Support dual SIM cards
- Support 3GPP Release 9 compliant
- Support 1TX/2RX
- Support UE Category 4
- Supports QoS service flow initiated by CPE
- Supports Dynamic Host Configuration Protocol
- Backup battery support (power off enabled)
- Built-in web server for web-based configuration
- Password protected access and configuration
- Supports IEEE 802.3, IEEE 802.3u
- USIM Slot
- Support 2.4GHz Wi-Fi6

## Technical Specification :

Hardware Specifications			
General	Main chip	ZX297520V3E	
	USIM Slot	1.8V/3.0V USIM	
	Storage	64MB SD RAM + 1GB NAND Flash	
	Supported Operating Systems	Linux/Android/Windows	
	Power level	Class 3 (23.5dBm ± 2dB) for WCDMA bands	
		Class 3 (23dBm ± 2dB) for LTE bands	
	wifi	WiFi-6 2.4GHz. (300Mbps)	
	Network port type	RJ45 x 2, LAN 10/100/1000 auto-sensing	
	Voice chip	SI32185	
	The power adapter	DC Power 12V/1A	
SIM slot	1.8v/3.1V USIM		
WiFi	Standard	IEEE 802.11 b/g/n	
	Channel Bandwidth	20MHz, 40MHz, 80MHz	
	TXRX	2T2R	
	MIMO	DL 2 x 2 MIMO	
	Rate	802.11b:11Mbps	
		802.11g:54Mbps	
		802.11n:300Mbps	
	Modulation	DSSS/CCK, OFDM	
	Antenna Type	External Antenna	
Active User	64		
Antenna Gain	1.5~2dBi		
RF Parameters	WCDMA	Band 1/5/8	
	FDD-LTE	Band 1/3/5/7/20/28	
	TDD-LTE	Band 38/39/40/41	
	WCDMA	Downlink peak rate 42Mbps Uplink peak rate 5.76Mbps	
	LTE-TDD	Downlink peak rate 300Mbps Uplink peak rate 50Mbps Downlink peak rate 220Mbps Uplink peak rate 30Mbps	
	WCDMA	Support 3GPP R9/DC-HSDPA/HSPA+/ HSDPA/HSUPA/WCDMA	
	LTE	Support 3GPP R12 Support max 2DLCA Support Downlink 64QAM ,16QAM ,QPSK Support Uplink 16QAM,QPSK Support RF bandwidth1.4MHz~20MHz	

## Software Specifications

Software	Language Support	Default English, other languages can be customized upon request
	IP Protocol	IPv4/IPv6
	SIM Management	PIN Management, SIM Lock
	Network Connection Management	Auto/Manual
	LTE Scan Mode	Full band scan, Frequency Lock
	WLAN	Configuration, WPS
	VPN	L2TP, PPTP
	NAT	Port forwarding DMZ
	Firewall	IP/MAC/URL Filter Access Control TCP port scan Death of Ping
	Network Management	TRO69
	Statistics	LTE Status Connection Status System Up Device Status DHCP Client List WIFI Status Firewall Status
	Maintenance	Date & Time setting Restore factory settings Restore / Back up configuration file Firmware upgrade locally/OTA (over the air)

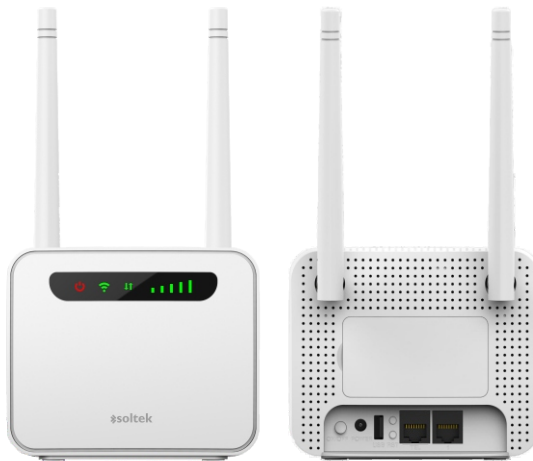

### NOTICE

SUMICO reserves the right to change specifications without notice. The information in this manual, though carefully compiled, should not be regarded as a guarantee of product characteristics. SUMICO is only responsible for the extent specified in the sales and delivery terms. The copy and distribution of the attached documents and software and the use of its contents shall be authorized in writing by SUMICO

### SUMICO

Tarvij Sanat Sumi Parsian Co. LTD  
No.1, 4th Narges Alley, Azadi Bolv. Shams-Abad Industry Park,  
Tehran-Qom Highway, Hasan Abad Fashafooye, Tehran, Iran  
Tel: +98 21 43614000 Fax: +98 21 43614300  
E-Mail: info@sumico.ir PC: 1834179535

